




MOUNTING

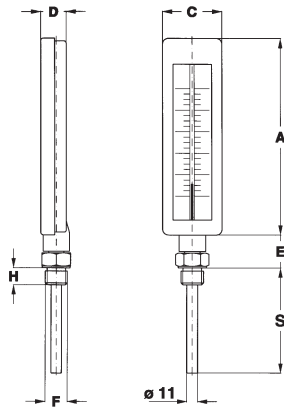

Cod. 1



Cod. 2



Cod. 4

ND	F	A	C	D	E	M	H	S	Weight lbs. (kg)
H 7" (180 mm)	41M - G 1/2 A 51M - G 3/4 A	7.09 (180)	2.17 (55)	0.98 (25)	1.24 (31,5)	2.42 (61,5)	0.63 (16)	3.94...19.69 (100...500)	1.32...2.42 (0,6...1,1)
I 10" (250 mm)	43M - 1/2-14 NPT 53M - 3/4-14 NPT	9.84 (250)	2.17 (55)	0.98 (25)	1.24 (31,5)	2.42 (61,5)	0.63 (16)	3.94...19.69 (100...500)	1.54...2.64 (0,7...1,2)

FILLING LIQUIDS

°C	Colored fluid	Mercury
	A	B
-50...+30	v	
-50...+50	v	
-40...+40	v	
-30...+50	v	
-10...+50	v	
0...+80	v	
0...+100	v	
0...+120	v	
0...+160	v	
0...+200	v	
0...+240		v
0...+300		v
0...+400		v

“HOW TO ORDER” SEQUENCE

Section / Model / Mounting / Connection type / Diameter / Range / Process connection / Bulb type and length

6 V8 1 3 H 41M A
2 I 51M B
4 43M
53M